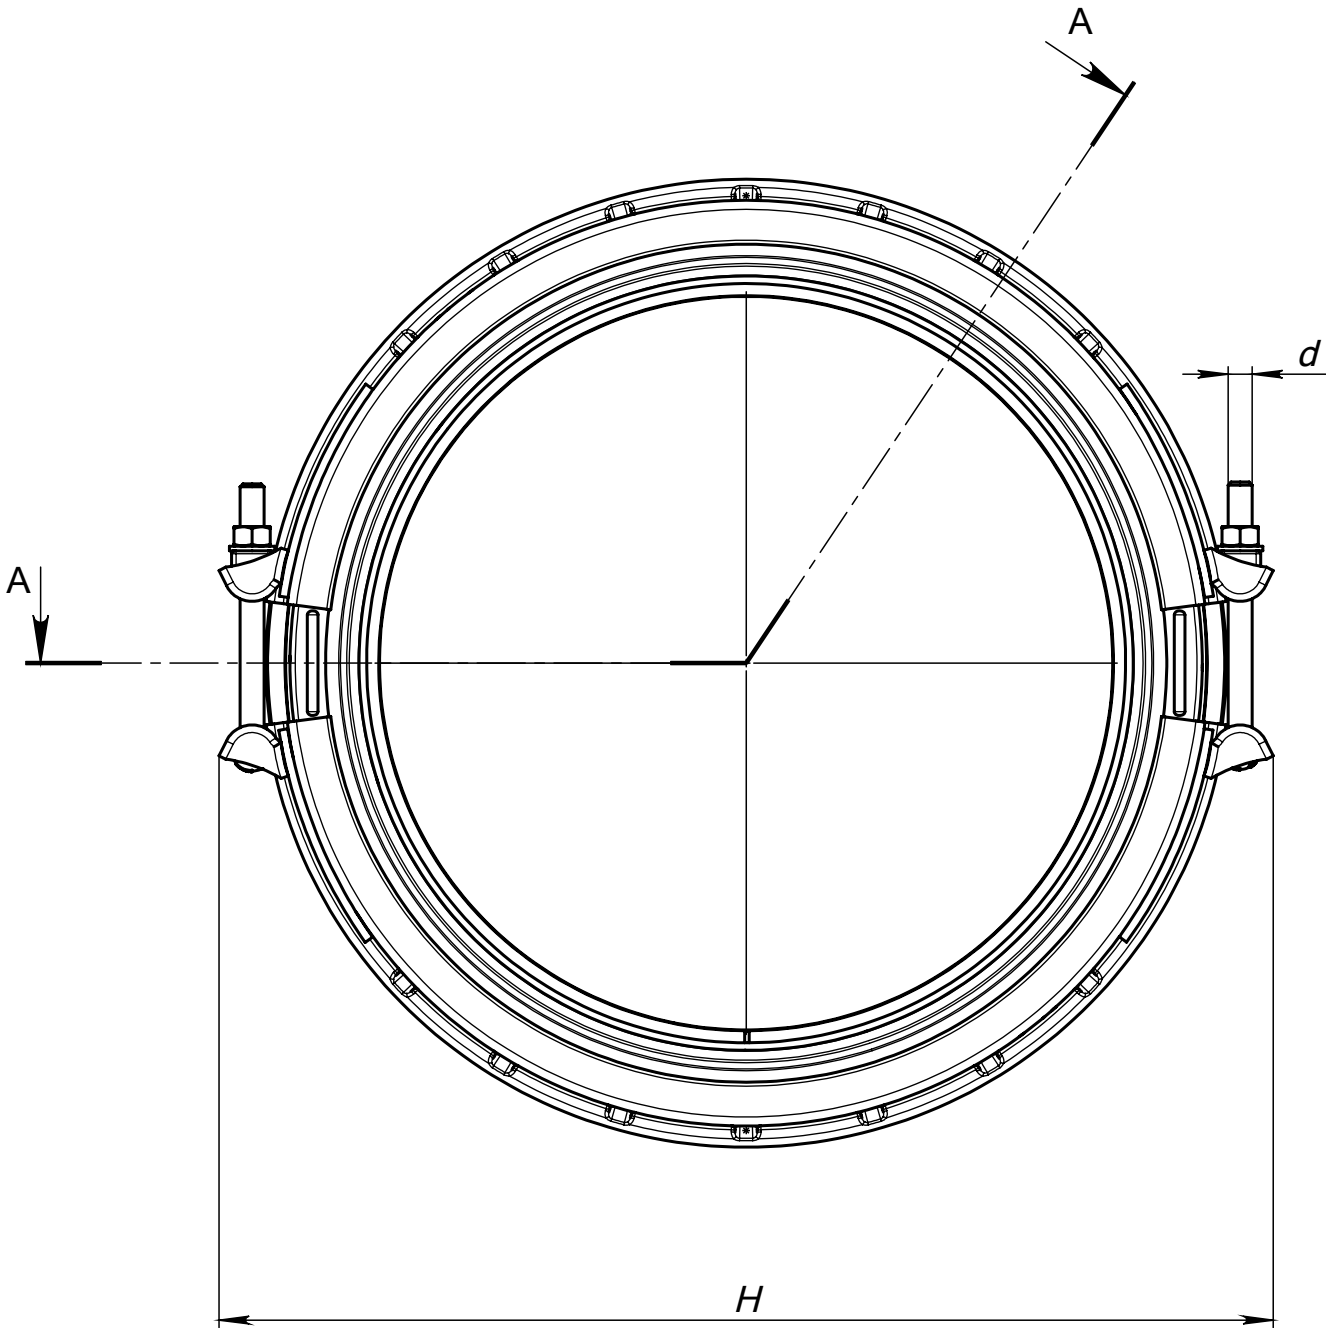
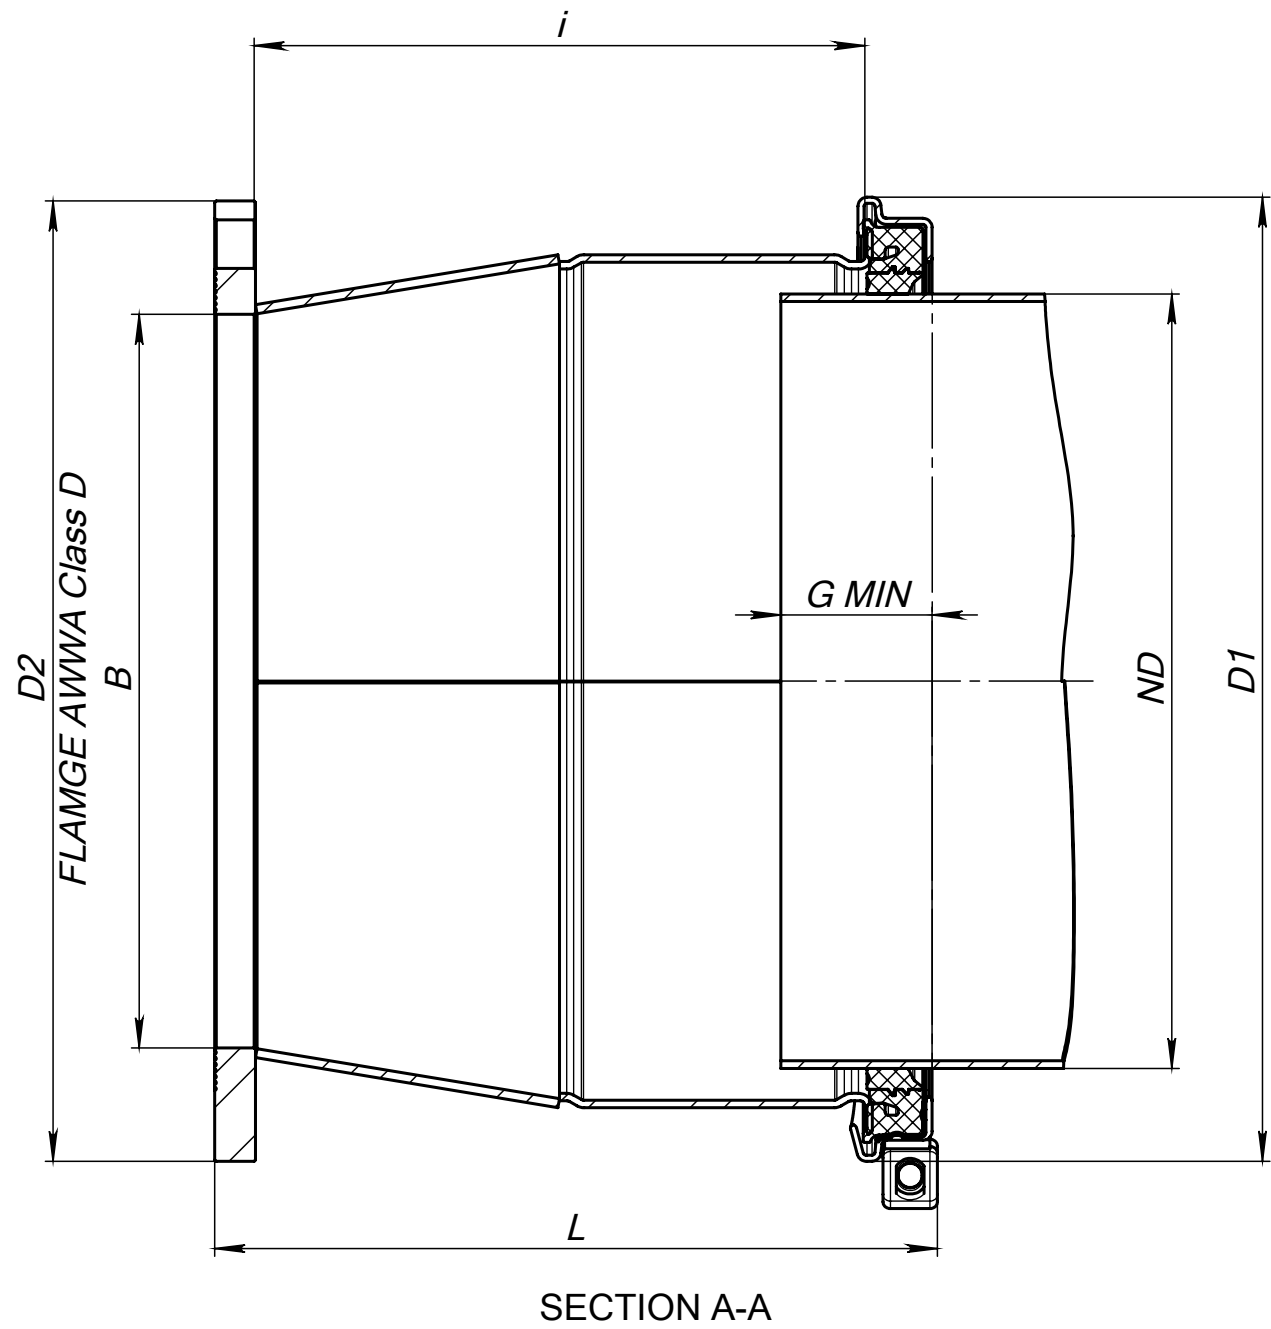




REVISIONS					
REV.	DESCRIPTION	ECO	DRAWN	APPROVED	DATE
D	Change material information	20000145	Noam S.	Tzah Gr.	01/11/2020



Weight: See Table			Part Name: HYMAX 2 F/A LONG 14"-24" AWWA-D		Scale
	Date	Name	Catalog No. SD974-54-02		DO NOT SCALE DRAWING
Design	27.10.19	Noam S.			
Check	05/11/2019	Noam S.	Drawing No. SD974-54-02		Sheet
Appr.	05/11/2019	Tzah Gr.			1 of 2
 Confidential Information. All rights reserved to Krausz Industries Ltd. This document may not be copied, reproduced, displayed, modified or used in any way, whether in whole or in part, without the express prior written consent of Krausz Industries Ltd.					Size A3

RELEASED

REVISIONS					
REV.	DESCRIPTION	ECO	DRAWN	APPROVED	DATE
D	Change material information	20000145	Noam S.	Tzah Gr.	01/11/2020



Krausz Part Number	ND	Flange	Overall Range (inch)	Range Before Flipping Gasket (inch)	Range After Flipping Gasket (inch)	D1 (inch)	H (inch)	i (inch)	L (inch)	D2 (inch)	B (inch)	Bolts Qty.-Size d (mm)	Torque (Ft-Lbs)	Approx. Weight (Lbs)
974-54-14037812	14"	14"	15.00-17.10	15.00-16.10	16.02-17.10	Ø21.0	23.2	15.8	18.7	Ø21.0	Ø15.43	2 -M16	150	117.04
974-54-16043412	16"	16"	17.10-19.20	17.10-18.19	18.11-19.20	Ø23.2	25.6	15.8	18.7	Ø23.5	Ø17.91	2 -M16	150	131.56
974-54-18048812	18"	18"	19.20-21.30	19.20-20.29	20.21-21.30	Ø25.3	27.8	15.8	18.7	Ø25.0	Ø19.09	2 -M16	150	148.06
974-54-20054012	20"	20"	21.25-23.35	21.25-22.35	22.27-23.35	Ø27.3	29.8	15.8	18.8	Ø27.5	Ø21.34	2 -M16	150	
974-54-24060612	24"	24"	23.85-25.95	23.85-24.96	24.88-25.95	Ø29.1	31.7	15.8	18.9	Ø32.0	Ø25.91	2 -M16	150	
974-54-24062412	24"	24"	24.60-26.70	24.60-25.67	25.59-26.70	Ø30.6	33.2	15.8	18.9	Ø32.0	Ø25.91	2 -M16	150	

Material information:

- 1) HYMAX conforms with or exceeds requirements of standards: NSF-61 and NSF-372.
- 2) Flanged Body - ASTM A 283 / A 283M Grade C Steel.
- 3) End Rings:
  - 14"-16" - ASTM A 283 / A 283M Grade C Steel.
  - (or Ductile Iron Casting ASTM A536 grade 65-45-12)
  - 18"-24" - ASTM A 283 / A 283M Grade C Steel.
- 4) Gaskets - EPDM compounded for water and sewerage in accordance with ASTM D2000  
Working Temperature:  
for continuous operations: -20°F up to +180°F.  
for short time operations: up to +215°F.
- 5) Bolts and Nuts - AISI 304 stainless steel.  
Rolled thread and anti galling coating.
- 6) Bridge - AISI 304 stainless steel.
- 7) Spherical spacers - AISI 304 stainless steel.
- 8) Flange - meets AWWa class D
- 9) Coating - 100% Fusion bonded epoxy for enhanced corrosion protection.  
Average thickness 14 Mil.  
Working Temperature:  
above ground applications: up to +125°F.  
under ground applications: up to +150°F.



Product performance	
Dynamic deflection	up to 4°
G - Min. pipe Insertion	4.0"
Maximum offset for misaligned pipe	0.24"
Maximum out of roundness	0.51"
Working Pressure	175 PSI
Rated Pressure	263 PSI
Vacuum Test	12 PSI

Weight: See Table			Part Name: HYMAX 2 F/A LONG 14"-24" AWWA-D		Scale
	Date	Name	Catalog No. SD974-54-02		DO NOT SCALE DRAWING
Design	27.10.19	Noam S.			
Check	05/11/2019	Noam S.	Drawing No. SD974-54-02		Sheet 2 of 2
Appr.	05/11/2019	Tzah Gr.			
 Confidential Information. All rights reserved to Krausz Industries Ltd. This document may not be copied, reproduced, displayed, modified or used in any way, whether in whole or in part, without the express prior written consent of Krausz Industries Ltd.					Size A3

RELEASED